(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



I TERRE BRITTIER IN BUTTIER INDITERRITERIER BERTHER BERTHER IN DER BERTHER BRITTER BERTHER BERTHER BERTHER BER

(43) International Publication Date 25 March 2004 (25.03.2004)

PCT

(10) International Publication Number WO 2004/023914 A1

(51) International Patent Classification⁷:

A42B 3/30

(21) International Application Number:

PCT/AU2003/001167

(22) International Filing Date:

5 September 2003 (05.09.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2002951326

11 September 2002 (11.09.2002) A


- (71) Applicant (for all designated States except US): IN-NOTECH PTY LTD [AU/AU]; Cnr Miles Platting Road & McKechnie Drive, Eight Mile Plains, QLD 4113 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): MIRANDA, Stephen,

Alfred [AU/AU]; 60-62 Highview Tce, Daisy Hill, QLD 4127 (AU).

- (74) Agent: EAGAR NEWCOMB & BUCK PATENT AND TRADE MARK ATTORNEYS; PO Box 509, Spring Hill, QLD 4004 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: COMMUNICATION APPARATUS AND HELMET

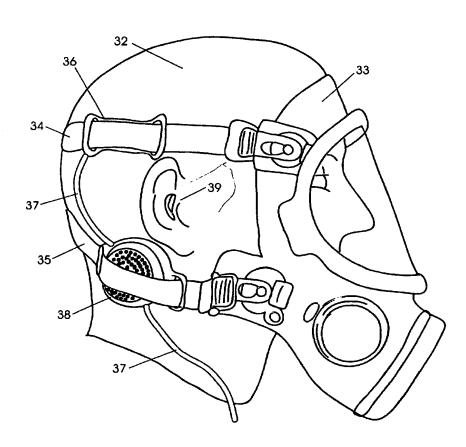

(57) Abstract: A communication apparatus includes a support structure (41) that is fastenable to a safety helmet (58). A vibration conduction microphone (54) is carried by the support structure. The vibration conduction microphone and the speaker enclosure (43) are positioned so that, when the support structure is fastened to the safety helmet, the vibration conduction microphone and the speaker enclosure come into contact with a rear of the wearer's head.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report